


No need for shutdowns The emergency problem solver Intertherm 2205

 International

100% Uptime

100% Operational

100% Profitability maintained

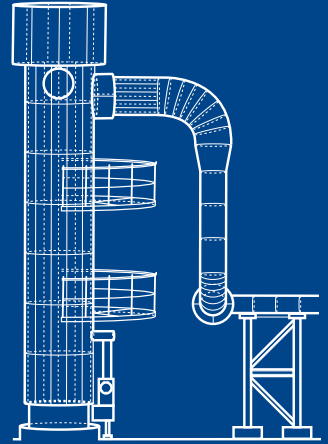

Specifically designed with
hot spread epoxy technology
for brush/roller application
to hot rusted steel (205°C or
401°F)

The applicator

Be the hero in an emergency situation

Application to minimally prepared
steel works on St2 (SP2), excellent
adhesion and corrosion resistance.

HSE (Health, Safety & Environmental
benefits) of lower VOC emissions
compared to competitor
products reduces worker impact
during application.

Intertherm 2205

Minimally prepared steel

High temperature
material / product

international-pc.com

© Registered trademark of AkzoNobel in one or more countries. © 2025 Akzo Nobel N.V.

AkzoNobel